
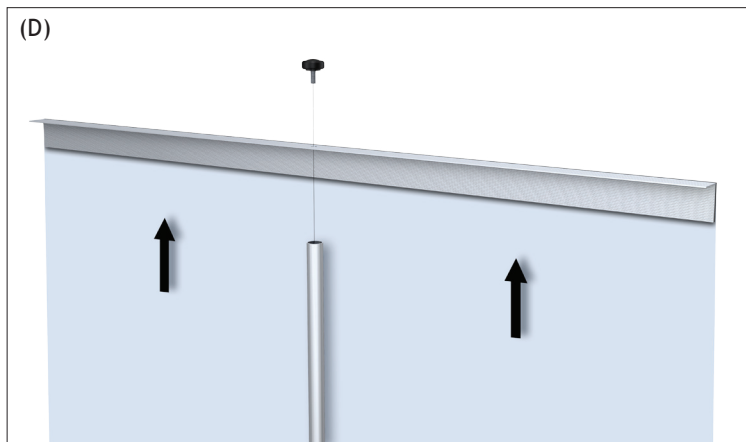
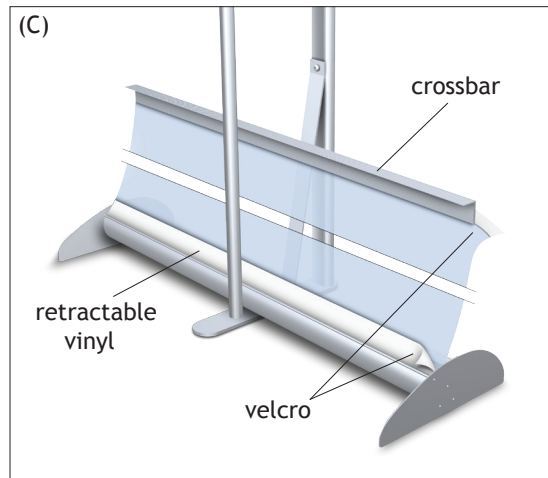
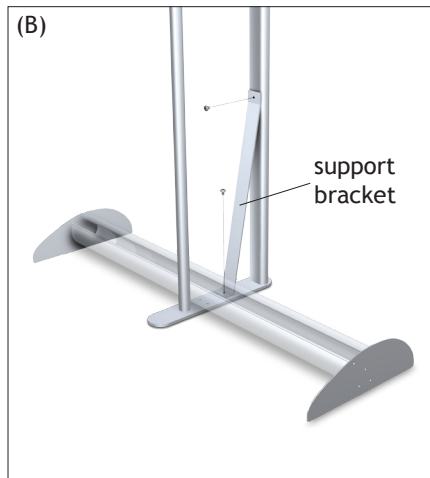


Mercury Hybrid Tablet Displays (iPad Stand™)

1. Mount telescopic graphic pole to base using large round head phillips screw provided (fig. A-1).
Mount tablet upright to base using two round head allen screws provided (fig. A-2).
2. Mount support bracket to base and tablet upright using small round head phillips screws provided (fig. B).
3. Attach graphic to crossbar and retractable vinyl with Velcro hook and loop (fig. C).
4. Pull crossbar up and mount to top of the telescopic graphic pole using knob (fig. D). Extend pole and tighten locks to secure at desired height (not shown).

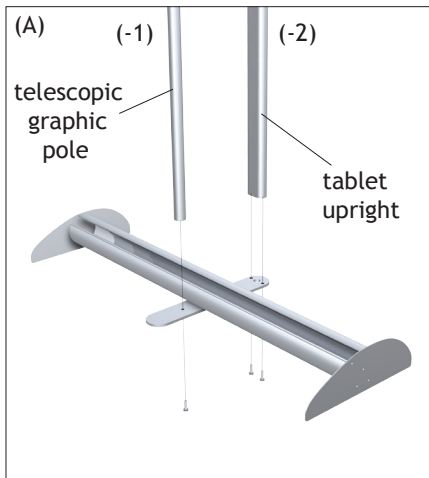

Mercury Hybrid Tablet Displays (iPad Stand™)

5. Mount tablet holder to upright by sandwiching ball joint in between the collar halves and use large tamper-proof key to screw securely into place (fig. E/F).
6. Remove acrylic cover using small tamper-proof key provided. Place tablet inside and reassemble unit (fig. G).

